


All In One Solar Street Light -Parameters

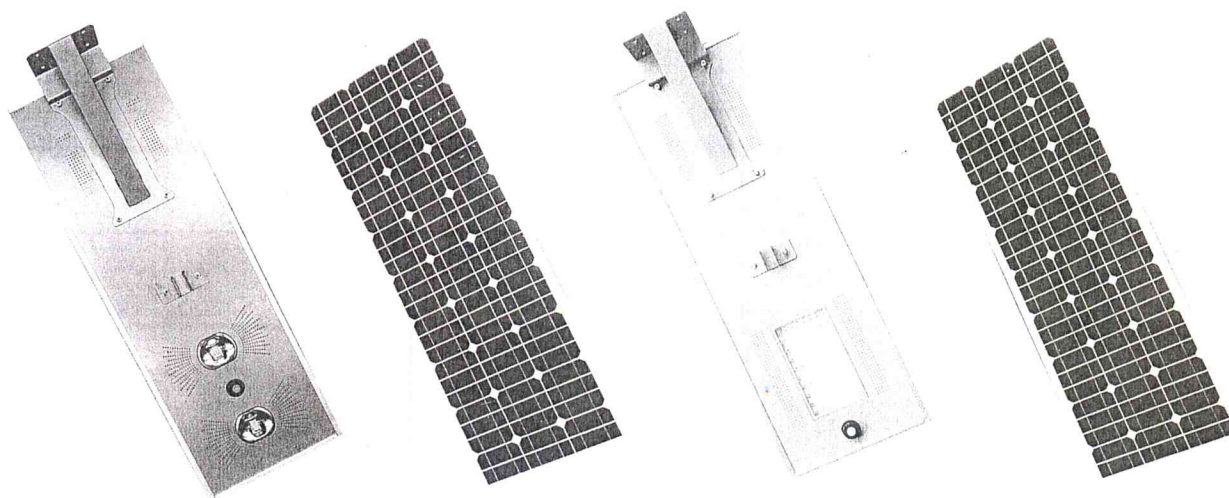

All In One Solar Street Light (25W-100W)									
Specidication		25W	30W	40W	50W	60W	70W	80W	100W
Solar Panel	Max Power(18V)	50W	60W	60W	70W	80W	100W	110W	150W
	Brand	High Efficiency Mono-Crystalline Silicon							
	Life Time	25 Years							
Battery	Type(LiFePO4 12.8V)	21AH	24AH	27AH	30AH	33AH	45AH	54AH	66AH
	Life Time	5 Years							
Led Lamp With IP68 PIR Motion Sensor	Max Power(12V)	25W	30W	40W	50W	60W	70W	80W	100W
	Lumen(LM)	2750-3250	3300-3900	4400-5200	5500-6000	6600-7800	7700-9100	8800-10400	11000-13000
	LED Chip	Bridgelux Made in USA							
	Viewing Angle	120°							
	Life Time	50000 Hours							
Charge Time	By Sun	7Hours	7Hours	7Hours	8Hours	8Hours	10Hours	10Hours	10Hours
Discharge Time	Full Power Mode	>15Hours	>15Hours	>15Hours	8Hours	>15Hours	>17Hours	>17Hours	>18Hours
	Saving Power Mode	>30Hours	>30Hours	>30Hours	8Hours	>30Hours	>34Hours	>34Hours	>35Hours
Working Temperature	Range(°C)	-20°C ~+70°C							
Color Temperature	Range(k)	6000k-6500k							
Mounting Height	Range (m)	7-8	7-8	7-8	7-9	7-9	9-10	9-10	10-12
SpaceBetweenLight	Range (m)	25-30	25-30	25-30	30-40	30-40	40-50	40-50	40-50
Main Material	Aluminium Alloy								
Certificate	CE / ROHS / IP65/ISO9001								
Warranty Period	2/3/5 Years								